
Acadia 138

THICKNESS: 1 3/8" POLYURETHANE, R-12



Every detail guaranteed™

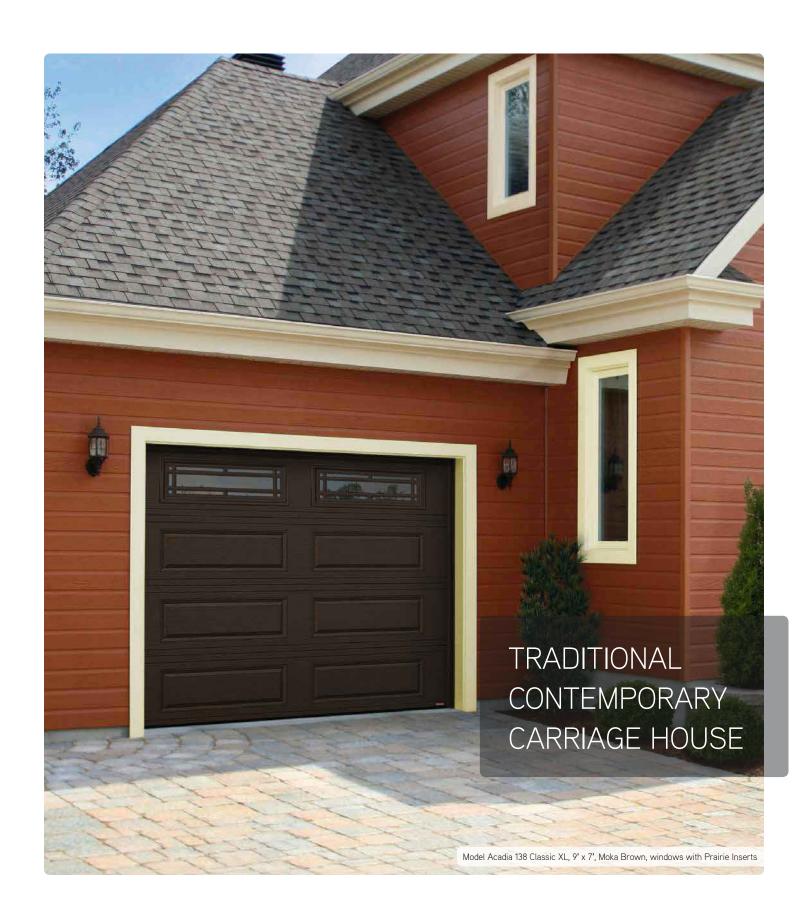

WHY HAVE MORE THAN 1.7 MILLION GARAGA DOORS BEEN INSTALLED SINCE 1983?

SUPERIOR PERFORMANCE

Get a product that exceeds your expectations. Our garage doors, inspired by Canada's severe weather, are energy efficient as they are first and foremost weathertight. They are strong and constructed with long-lasting components, rigorously selected to give a flawless finish, both up close and at a distance.



ONE OF THE LARGEST SELECTIONS IN THE INDUSTRY

With nearly 14,000 possible combinations, you are sure to find the garage door you are looking for. Select style, color and much more by visiting garaga.com/designcentre. There, you can create and view online the perfect door to enhance your house and be assured you're making the best decision.



A PICTURE IS WORTH A THOUSAND WORDS

So that you can make an informed decision, all the options you want can be **quickly** calculated then presented to you in a **clear**, **illustrated quotation**. Once your garage door has been chosen, your quotation is automatically transmitted to our factory to be **precisely custom-crafted**.





TRADITIONAL

Acadia 138


STEEL THICKNESS: 1 ¾"

POLYURETHANE. R-12

MODEL PATTERN AND LAYOUTS

CLASSIC (21" x 13" and 40" x 13")





SIZES -

Widths from 8' to 18', in 1" increments. Heights from 6'6" to 8', in 3" increments. See your garage door dealer for more details on oversized doors available.

COLORS -

STANDARD










Moka Brown




Visit garaga.com/gentek to see Gentek's equivalent aluminum capping.

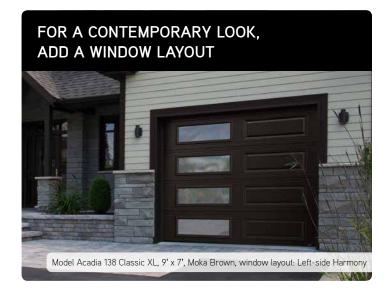

WARRANTY

Door sections: limited lifetime Weatherstripping: 1 year Windows: 10 years against seal defects Hardware Dura+: 2 years / Value kit: 1 year

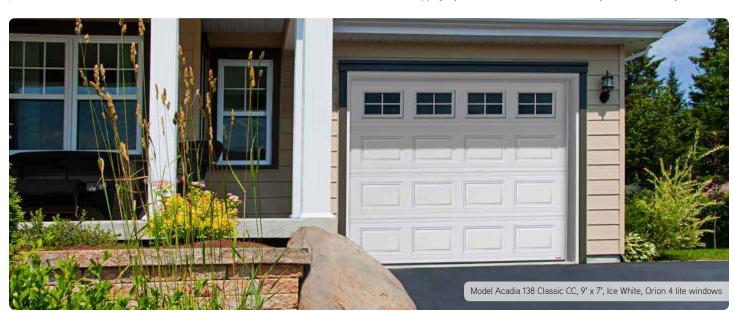

CONTEMPORARY

Acadia 138


STEEL THICKNESS: 1 %"


POLYURETHANE, R-12

MODEL PATTERNS AND LAYOUTS -



GROOVED (1" continuous lines)







COLORS -







Ice White Desert Sand



Dark Sand Mo

Visit garaga.com/gentek to see Gentek's equivalent aluminum capping.



SIZES -

Widths from 8' to 18', in 1" increments. Heights from 6'6" to 8', in 3" increments. See your garage door dealer for more details on oversized doors available.

WARRANTY -

Door sections: limited lifetime Weatherstripping: 1 year Windows: 10 years against seal defects Hardware Dura+: 2 years / Value kit: 1 year



CARRIAGE HOUSE

Acadia 138


STEEL THICKNESS: 1 %'

POLYURETHANE. R-12

MODEL PATTERN AND LAYOUTS

NORTH HATLEY (19 3/4" x 15" grouped by 2 and 40 1/2" x 15")





SIZES -

Widths from 8' to 18', in 1" increments. Heights from 6'6" to 8', in 3" increments. See your garage door dealer for more details on oversized doors available.

WARRANTY -

Door sections: limited lifetime Weatherstripping: 1 year Windows: 10 years against seal defects Hardware Dura+: 2 years / Value kit: 1 year

COLORS -

STANDARD







Ice White

Dark Sand

Moka Brown



Visit garaga.com/gentek to see Gentek's equivalent aluminum capping.

DECORATIVE HARDWARE -

HANDMADE WROUGHT IRON TEXTURE







SLIGHTLY BUMPY TEXTURE










PLASTIC INSERTS¹








¹ For the North Hatley pattern, only the 40" x 13" window inserts are available.

Williamsburg¹

[†]For all available Williamsburg Inserts,

Richmond Arch


ORION²

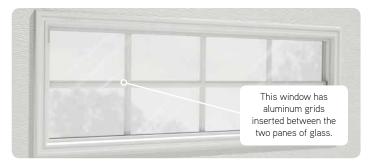



² Colors of grids are only available in White and Claystone. ³ Not available for North Hatley pattern.



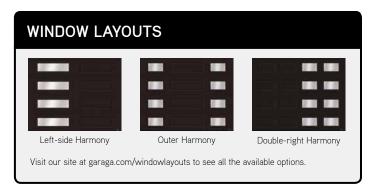



GARAGA CONSTRUCTION MAKES ALL THE DIFFERENCE







INTERLOK™ JOINT

Located between sections, this joint blocks air infiltration due to its triple-contact weatherseal.

Makes sections very strong as it is mechanically interlocked and not bonded.

2 WOOD END BLOCKS

The most effective thermal breaks, they eliminate any transfer of cold or heat between materials.

3 REINFORCED METAL PLATES

With 14-gauge thickness, they are used to solidly attach hinges, handles and operator bracket.

4 HIGH-PERFORMANCE WEATHERSTRIPPING

Our weatherstripping ensures increased weathertightness and stays flexible through the coldest temperatures.

5 POLYURETHANE

High-pressure injected foam provides R-12 thermal resistance for 1 %" doors.

Because it adheres to the section walls, it provides a high level of rigidity to the door.

6 CONTINUOUS WOODGRAIN

Up close or at a distance, our embossed woodgrain finish is flawless and very refined.

7 MOLDED WINDOW FRAMES

Both our interior and exterior window frames are molded without joints or any visible screws. They are made of synthetic resin that is sun resistant to keep their good looks over the years.



wins hands down. Watch our 45-second


videos at garaga.com/lab




To save energy, all components of a garage door must be taken into consideration (joints between sections, weatherstripping, end blocks, etc.) and not just its thermal resistance R-value as that only refers to the construction of the sections.

GARAGA

lab

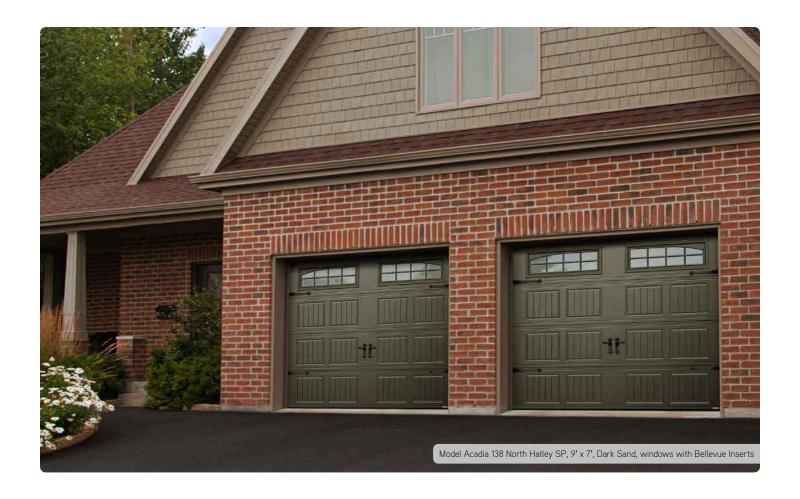

LiftMaster





- · Ultra-quiet
- · Drive system: belt or chain
- 3/4 HP, power: AC or DC



- Ultra-quiet
- · Drive system: jackshaft
- Power: DC





- Quiet
- · Drive system: belt or chain
- 1/2 HP, power: AC or DC

Silent and reliable garage door openers



your garage door opener for greater control and security of your home.





8500 25th Avenue Saint-Georges, QC G6A 1K5 Canada

418 227-9458 info@garaga.com garaga.com





YOUR GARAGA **DISTRIBUTOR**

